

TOPBAND バッテリー実例

低速走行車向け電池モジュール

Low-speed car lithium battery-solve the trouble of long charging time and short range

TOPBAND

Leading Industry company

Independent design and development,

Quality Controllable



TB24165F-T110A



TB72105F-T110C




① Independent design and development of battery cell+BMS+PACK with controllable quality

② Automated PACK production line

③ Stable structure, GB38031 strong inspection certification

④ BMS Core Team

実用例 ——低速走行車用電池ユニット——

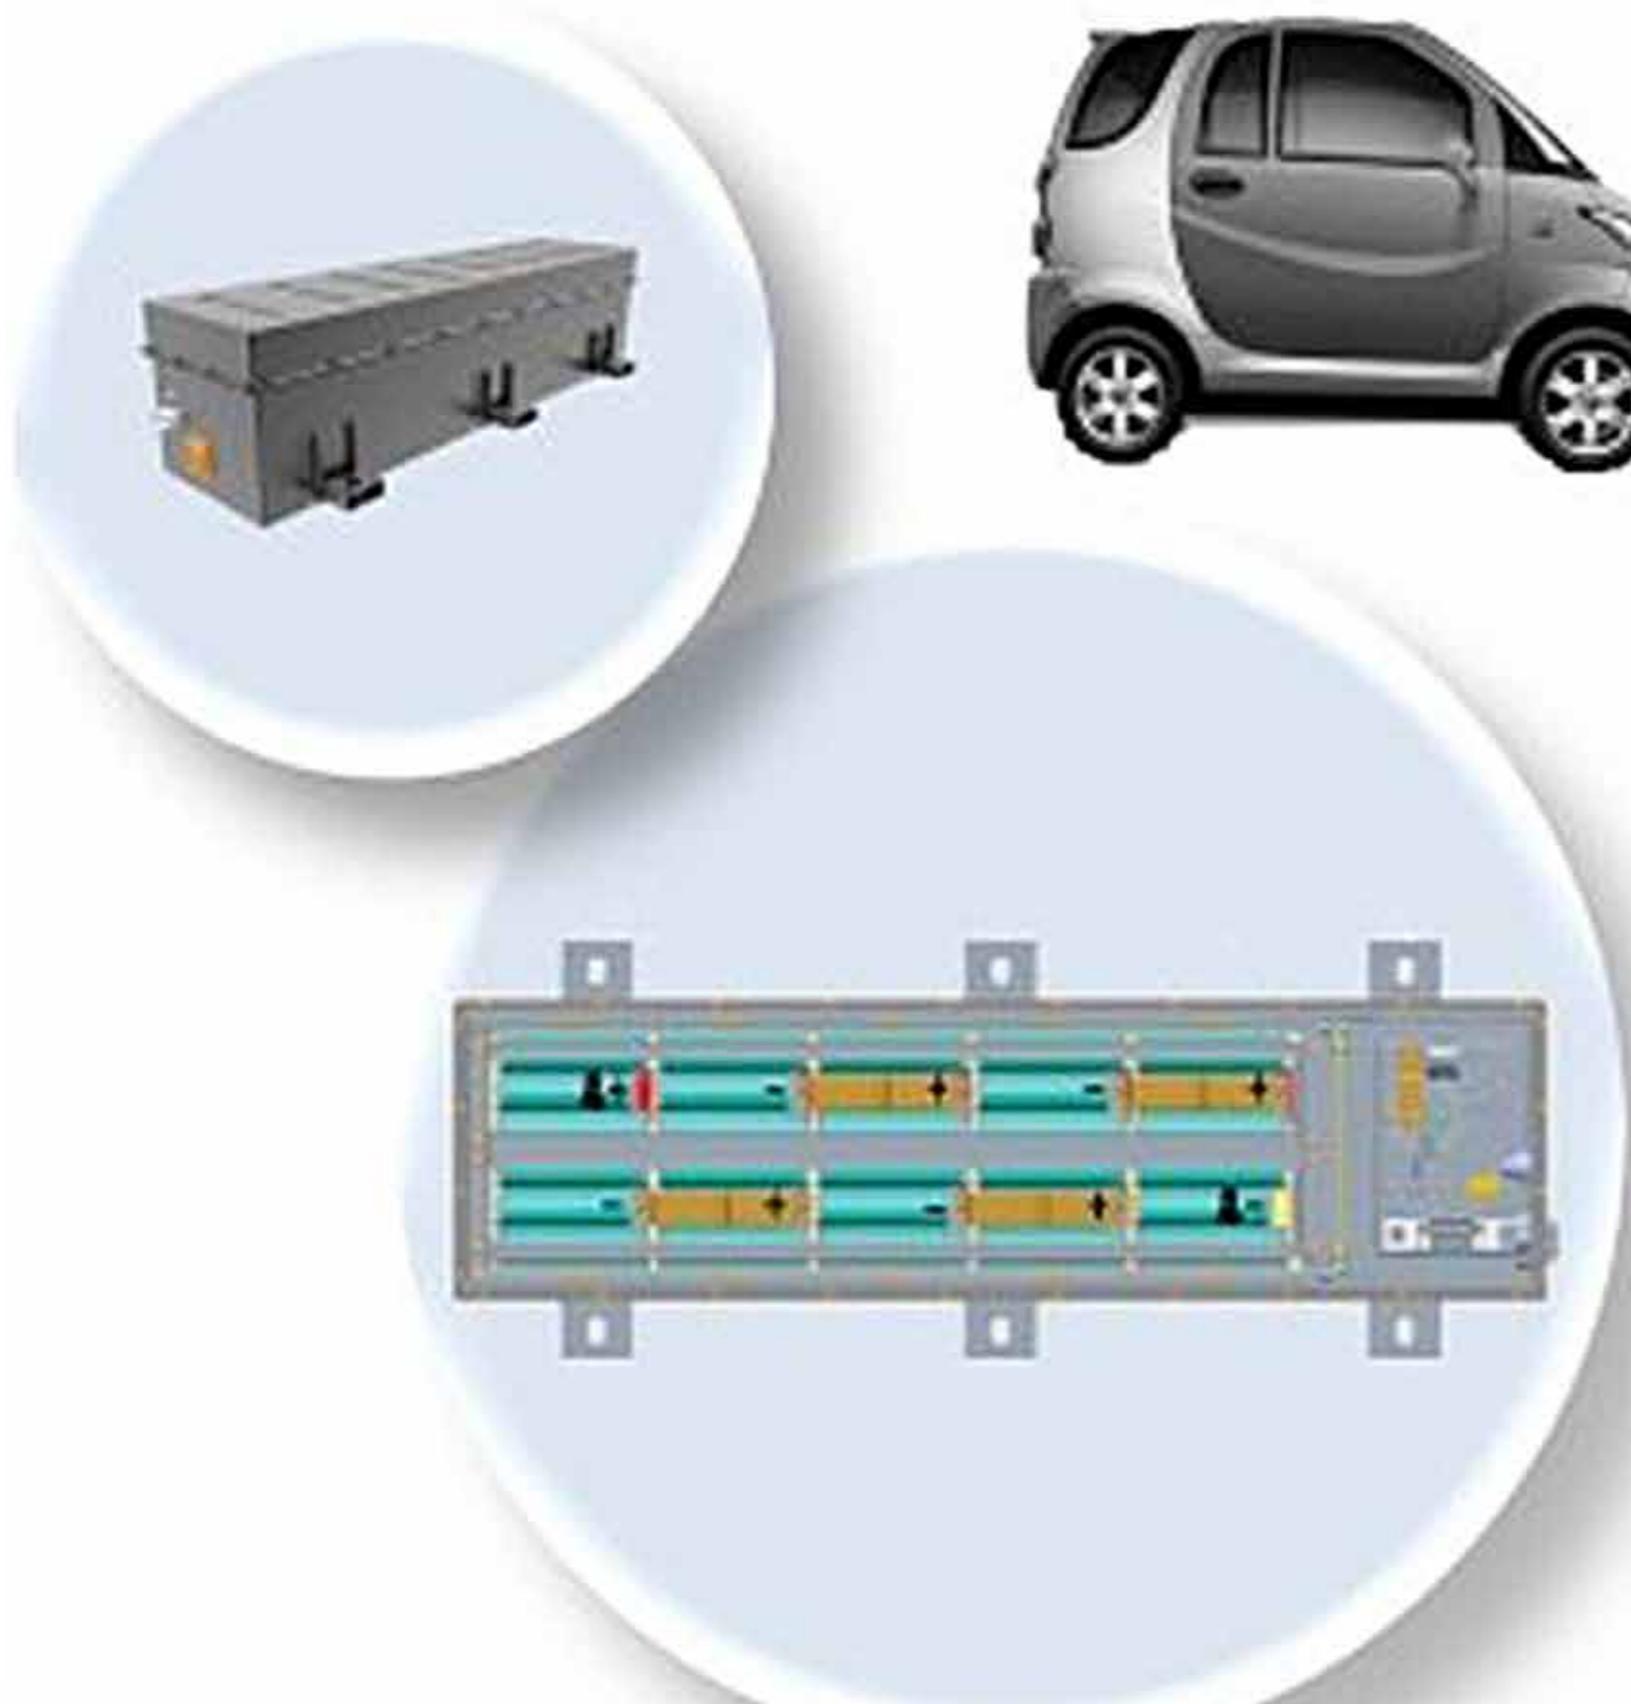

型番	TB64105F-T110A
バッテリコア	TB-33138-15Ah(LFP)
バッテリスペック	64V/105Ah(20S7P)
動作電圧	54V~73V
放電電流	105A, 210A@30S
循環寿命	≥1000回
重量	70Kg
サイズ	1000*270*250mm



規格	參 数			
型号	TB12100F-SC-S110A	TB12150F-S110B	TB12200F-S110A	TB12300F-SC-S107B
能量	1280Wh	1920Wh	2560Wh	3840Wh
持续放电电流	1C	1C	1C	1C
尺寸	307x168x211mm	483x170x241mm	483x170x241mm	520x222x269mm